

**B. Tech Degree III Semester Examination, November 2007**

**CE/EE 303 STRENGTH OF MATERIALS**  
(2006 Admissions)

Time : 3 Hours

Maximum Marks : 100

**PART - A**  
(Answer ALL Questions)


(8 x 5 = 40)

- I.
  - (a) Draw the stress strain diagram for mild steel and explain the salient points.
  - (b) Explain the terms (i) Creep (ii) Hokes Law (iii) Poisson's Ratio.
  - (c) Prove the relationship between modulus of elasticity E and rigidity modulus G.
  - (d) Explain the relation ship between shear force and bending moment.
  - (e) State the assumptions made in the theory of Simple Bending.
  - (f) Explain the terms Principal Planes and Principal Stresses.
  - (g) Determine the deflection at the force end of a cantilever supporting a concentrated load P at the free end.
  - (h) Explain the term effective length of columns. Also write the effective length factor for different end conditions.

**PART - B**



(4 x 15 = 60)

- I. The bar ABCD shown in figure consists of three cylindrical steel segments each with a different cross sectional area. Axial load are applied as shown. Calculate the normal stress in each segment.

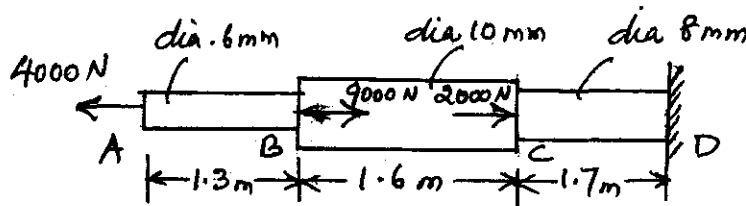

OR


- II. A prismatic bar having cross sectional area  $A = 1200 \text{ mm}^2$  is compressed by an axial load  $P = 90 \text{ KN}$ .
  - (i) Determine the stresses acting on an inclined section PQ cut through the bar at an angle  $\theta = 25^\circ$
  - (ii) Determine the complete state of stress for  $\theta = 25^\circ$  and show the stresses on a properly oriented stress element.

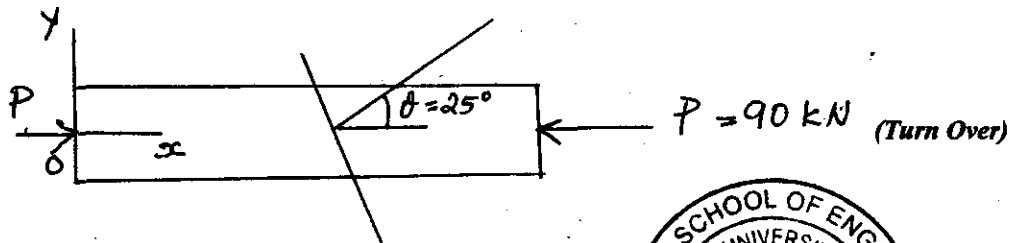

- III. A solid shaft 125 mm in diameter transmits 120 KW at 160 rpm. Find the maximum shear stress induced in the shaft. Find also the angle of twist in a length of 7.5 m. Take modulus of rigidity  $G = 8 \times 10^4 \text{ N/mm}^2$ .

OR

- IV. Draw the shear force and bending moments diagrams for the cantilever shown in figure.

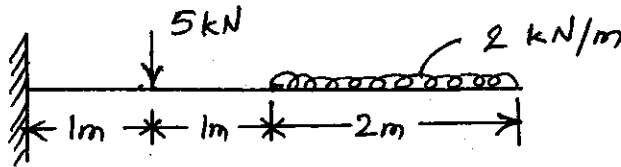

- V. A wooden beam AB supporting two concentrated loads P has a rectangular cross section of width  $b = 100 \text{ mm}$  and height  $h = 150 \text{ mm}$ . The distance from each end of beam to the nearest load  $a = 0.5 \text{ m}$ . Determine the maximum permissible value P max of the loads if the allowable stress in bending  $\sigma_{allow} = 11 \text{ MPa}$  (for both tension and compression) and the allowable stress in horizontal shear  $\tau_{allow} = 1.2 \text{ MPa}$ .

OR

- VI. At a certain point in a strained material the intensities of normal stresses on two planes at right angles to each other are  $20 \text{ N/mm}^2$  and  $10 \text{ N/mm}^2$ , both tensile. They are accompanied by shear stress at  $10 \text{ N/mm}^2$ . Find the principal planes and principal stresses. Find also the maximum shear stress.

- VII. A timber beam 100 mm wide and 250 mm deep is simply supported over a span of 4 m. Find the uniformly distributed load that can be applied on the beam over the whole span so that the deflection at the centre may not exceed 6 mm. Take  $E = 1.12 \times 10^4 \text{ N/mm}^2$ .

OR

- VIII. A mild steel tube 4 m long 30 mm internal diameter and 4 mm thick is used as a sturt with both ends hinged. Find the collapsing load. Take  $E = 2.1 \times 10^5 \text{ N/mm}^2$ .

\*\*\*