PDF brought to you by ResPaper.com



GATE 2011: Mechanical Engineering

Answer key / correct responses on:

Click link: http://www.respaper.com/gate/661/4996.pdf

Other papers by GATE: http://www.respaper.com/gate/

Upload and share your papers and class notes on ResPaper.com. It is FREE!

ResPaper.com has a large collection of board papers, competitive exams and entrance tests.

ME: MECHANICAL ENGINEERING

Duration: Three Hours

Maximum Marks: 100


Read the following instructions carefully.

- Do not open the seal of the Question Booklet until you are asked to do so by the invigilator.
- Take out the Optical Response Sheet (ORS) from this Question Booklet without breaking the seal.
 If you find that the Question Booklet Code printed at the right hand top corner of this page does not match with the Booklet Code on the ORS, exchange the booklet immediately with a new sealed Question Booklet.
- Write your registration number, your name and name of the examination centre at the specified locations on the right half of the ORS. Also, using HB pencil, darken the appropriate bubble under each digit of your registration number and the letters corresponding to your test paper code (ME).
- Write your name and registration number in the space provided at the bottom of this page.
- This Booklet contains 20 pages including blank pages for rough work. After opening the seal at the specified time, please check all pages and report discrepancy, if any.
- 6. There are a total of 65 questions carrying 100 marks. All these questions are of objective type. Questions must be answered on the left hand side of the ORS by darkening the appropriate bubble (marked A, B, C, D) using HB pencil against the question number. For each question darken the bubble of the correct answer. In case you wish to change an answer, erase the old answer completely. More than one answer bubbled against a question will be treated as an incorrect response.
- Questions Q.1 Q.25 carry 1-mark each, and questions Q.26 Q.55 carry 2-marks each.
- 8. Questions Q.48 Q.51 (2 pairs) are common data questions and question pairs (Q.52, Q.53) and (Q.54, Q.55) are linked answer questions. The answer to the second question of the linked answer questions depends on the answer to the first question of the pair. If the first question in the linked pair is wrongly answered or is unattempted, then the answer to the second question in the pair will not be evaluated.
- Questions Q.56 Q.65 belong to General Aptitude (GA). Questions Q.56 Q.60 carry 1-mark each, and questions Q.61 - Q.65 carry 2-marks each. The GA questions begin on a fresh page starting from page 13.
- 10. Unattempted questions will result in zero mark and wrong answers will result in NEGATIVE marks. For Q.1 Q.25 and Q.56 Q.60, ⅓ mark will be deducted for each wrong answer. For Q.26 Q.51 and Q.61 Q.65, ⅔ mark will be deducted for each wrong answer. The question pairs (Q.52, Q.53), and (Q.54, Q.55) are questions with linked answers. There will be negative marks only for wrong answer to the first question of the linked answer question pair, i.e. for Q.52 and Q.54, ⅔ mark will be deducted for each wrong answer. There is no negative marking for Q.53 and Q.55.
- 11. Calculator is allowed whereas charts, graph sheets or tables are NOT allowed in the examination hall.
- Rough work can be done on the question paper itself. Additionally, blank pages are provided at the end of the question paper for rough work.

Name	A CONTRACTOR OF THE PARTY OF TH	
Registration Number	ME	1,80

). 1	Q. 25 carry one	mark soch	·		
ر. بر د. بر	Q. 25 Carry one	mark each.			
Q.1	The crystal structu	arc of austenite is		C.C.	
	(A) body centered(C) hexagonal clos		(B) face centered (D) body centered		
	(a) Heriagonia (b)	packed	(D) body centered	tetragonal	
Q.2	Which one among	the following welding	processes uses non-consu	ımable electrode?	
. <	(A) Gas metal arc welding (C) Gas tungsten arc welding		(B) Submerged arc welding (D) Flux coated arc welding		
Q.3	A thin cylinder of 5 MPa. The averag	inner radius 500 mm an e circumferential (hoop	d thickness 10 mm is su) stress in MPa is	bjected to an internal pressure o	
	(A) 100	(B) 250	(C) 500	(D) 1000	
Q.4	The coefficient of restitution of a perfectly plastic impact is				
	(A) 0	(B) 1	(C) 2	(D) ∞	
Q.5	If $f(x)$ is an even fu	nction and a is a positiv	re real number, then $\int_{0}^{a} f$	(x)dx equals	
77		0	-a		
	(A) 0	(B) a	(C) 2a	(D) $2 \int_{0}^{a} f(x) dx$	
	200		de	o all	
Q.6	The word kanban	is most appropriately as	sociated with		
	(A) economic order quantity (C) capacity planning		(B) just-in-time pro (D) product design	(B) just-in-time production (D) product design	
Q.7	Cars arrive at a ser The service time p waiting time in the	er car is exponential w	o Poisson's distribution ith a mean of 10 minut	with a mean rate of 5 per hour. es. At steady state, the average	
	(A) 10 minutes	(B) 20 minutes	(C) 25 minutes	(D) 50 minutes	
Q.8	The product of two	complex numbers 1+i	and $2-5i$ is		
	20% m m		ζ'	100 M	

2011 Match the following criteria of material failure, under biaxial stresses σ_1 and σ_2 and yield stress σ_y , with their corresponding graphic representations:

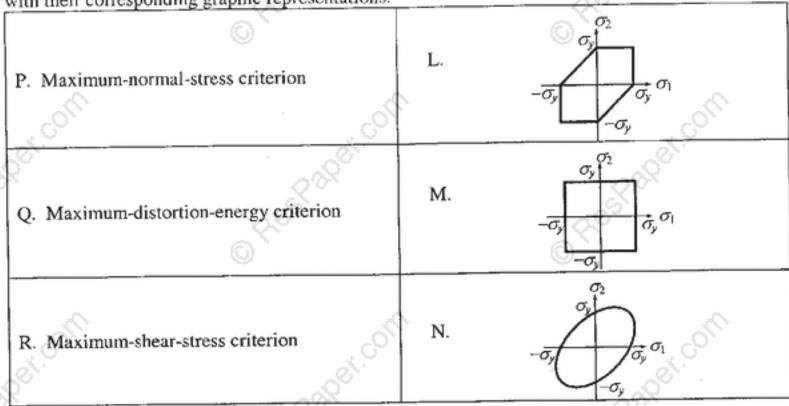

- (A) P-M, Q-L, R-N
- (C) P-M, Q-N, R-L

- (B) P-N, Q-M, R-L
- (D) P-N, Q-L, R-M

Q.10 The contents of a well-insulated tank are heated by a resistor of 23 Ω in which 10 A current is flowing. Consider the tank along with its contents as a thermodynamic system. The work done by the system and the heat transfer to the system are positive. The rates of heat (Q), work (W) and change in internal energy (ΔU) during the process in kW are

- (A) Q = 0, W = -2.3, $\Delta U = +2.3$
- (B) Q = +2.3, W = 0, $\Delta U = +2.3$
- (C) Q = -2.3, W = 0, $\Delta U = -2.3$
- (D) Q = 0, W = +2.3, $\Delta U = -2.3$

A pipe of 25 mm outer diameter carries steam. The heat transfer coefficient between the cylinder and surroundings is 5 W/m2K. It is proposed to reduce the heat loss from the pipe by adding insulation having a thermal conductivity of 0.05 W/mK. Which one of the following statements is TRUE?

- (A) The outer radius of the pipe is equal to the critical radius.
- (B) The outer radius of the pipe is less than the critical radius.
- (C) Adding the insulation will reduce the heat loss.
- (D) Adding the insulation will increase the heat loss.

What is $\lim_{\theta \to 0} \frac{\sin \theta}{\theta}$ equal to?

- (A) θ
- (B) $\sin \theta$
- (C) 0
- (D) 1

Q.13 Eigenvalues of a real symmetric matrix are always

- (A) positive
- (B) negative
- (C) real
- (D) complex

Q.14 Green sand mould indicates that

- (A) polymeric mould has been cured
- (B) mould has been totally dried

(C) mould is green in colour.

(D) mould contains moisture

A series expansion for the function $\sin \theta$ is

(A) $1 - \frac{\theta^2}{2!} + \frac{\theta^4}{4!} - \cdots$

(B) $\theta - \frac{\theta^3}{3!} + \frac{\theta^5}{5!} - \cdots$

(C) $1 + \theta + \frac{\theta^2}{2!} + \frac{\theta^3}{3!} + \cdots$

(D) $\theta + \frac{\theta^3}{3!} + \frac{\theta^5}{5!} + \cdots$

Q.16 A column has a rectangular cross-section of 10 mm×20 mm and a length of 1 m. The slenderness ratio of the column is close to

- (A) 200
- (B) 346
- (C) 477
- (D) 1000

Heat and work are

- (A) intensive properties
- (C) point functions

- (B) extensive properties
- (D) path functions

A hole is of dimension $\phi 9^{+0}$ mm. The corresponding shaft is of dimension $\phi 9^{+0.001}$ mm. The resulting assembly has

(A) loose running fit

(B) close running fit

(C) transition fit

(D) interference fit


The operation in which oil is permeated into the pores of a powder metallurgy product is known as

- (A) mixing
- (B) sintering
- (C) impregnation
- (D) infiltration

Q.20 The maximum possible draft in cold rolling of sheet increases with the

- (A) increase in coefficient of friction
- (B) decrease in coefficient of friction
- (C) decrease in roll radius
- (D) increase in roll velocity


A double-parallelogram mechanism is shown in the figure. Note that PQ is a single link. The mobility of the mechanism is

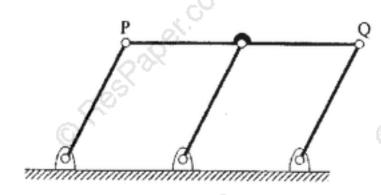

- (B) 0
- (C) 1

(D) 2

Q.22 A simply supported beam PQ is loaded by a moment of 1 kN-m at the mid-span of the beam as shown in the figure. The reaction forces R_P and R_Q at supports P and Q respectively are

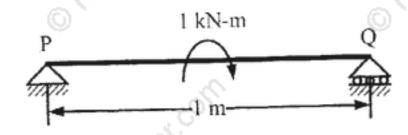

- (A) 1 kN downward, 1 kN upward
- (B) 0.5 kN upward, 0.5 kN downward
- (C) 0.5 kN downward, 0.5 kN upward
- (D) 1 kN upward, 1 kN upward
- Q.23 In a condenser of a power plant, the steam condenses at a temperature of 60 °C. The cooling water enters at 30 °C and leaves at 45 °C. The logarithmic mean temperature difference (LMTD) of the condenser is
 - (A) 16.2 °C
- (B) 21.6 °C
- (C) 30 °C
- (D) 37.5 °C

- Q.24 A streamline and an equipotential line in a flow field
 - (A) are parallel to each other
 - (B) are perpendicular to each other
 - (C) intersect at an acute angle
 - (D) are identical
- Q.25 If a mass of moist air in an airtight vessel is heated to a higher temperature, then
 - (A) specific humidity of the air increases
 - (B) specific humidity of the air decreases
 - (C) relative humidity of the air increases
 - (D) relative humidity of the air decreases

Q. 26 to Q. 55 carry two marks each.

Q.26 Match the following non-traditional machining processes with the corresponding material removal mechanisms:

Machining process	Mechanism of material removal		
P. Chemical machining	1. Erosion		
Q. Electro-chemical machining	2. Corrosive reaction		
R. Electro-discharge machining	3. Ion displacement		
S. Ultrasonic machining	4. Fusion and vaporization		

- (A) P-2, Q-3, R-4, S-1
- (C) P-3, Q-2, R-4, S-1

- (B) P-2, Q-4, R-3, S-1 (D) P-2, Q-3, R-1, S-4
- Q.27 A cubic casting of 50 mm side undergoes volumetric solidification shrinkage and volumetric solid contraction of 4% and 6% respectively. No riser is used. Assume uniform cooling in all directions. The side of the cube after solidification and contraction is
 - (A) 48.32 mm
- (B) 49.90 mm
- (C) 49.94 mm
- (D) 49.96 mm
- A single-point cutting tool with 12° rake angle is used to machine a steel work-piece. The depth of cut, i.e. uncut thickness is 0.81 mm. The chip thickness under orthogonal machining condition is 1.8 mm. The shear angle is approximately
 - (A) 22°
- (B) 26°
- (C) 56°
- (D) 76°

Consider the following system of equations:

$$2x_1 + x_2 + x_3 = 0,$$


$$x_2 - x_3 = 0,$$

$$x_1 + x_2 = 0.$$


This system has

(A) a unique solution

- (B) no solution
- (C) infinite number of solutions
- (D) five solutions
- A I kg block is resting on a surface with coefficient of friction $\mu = 0.1$. A force of 0.8 N is applied to the block as shown in the figure. The friction force is

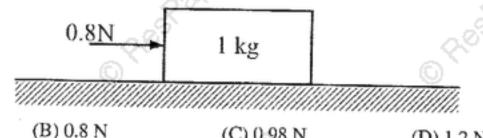

A disc of mass m is attached to a spring of stiffness k as shown in the figure. The disc rolls without Q.31slipping on a horizontal surface. The natural frequency of vibration of the system is

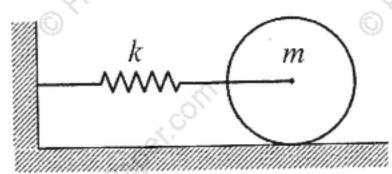

- (C) $\frac{1}{2\pi} \sqrt{\frac{2k}{3m}}$ (D) $\frac{1}{2\pi} \sqrt{\frac{3k}{2m}}$

Q.32 An ideal Brayton cycle, operating between the pressure limits of 1 bar and 6 bar, has minimum and maximum temperatures of 300 K and 1500 K. The ratio of specific heats of the working fluid is 1.4. The approximate final temperatures in Kelvin at the end of the compression and expansion processes are respectively

- (A) 500 and 900
- (B) 900 and 500
- (C) 500 and 500
- (D) 900 and 900

A spherical steel ball of 12 mm diameter is initially at 1000 K. It is slowly cooled in a surrounding of 300 K. The heat transfer coefficient between the steel ball and the surrounding is 5 W/m2K. The thermal conductivity of steel is 20 W/mK. The temperature difference between the centre and the surface of the steel ball is

- (A) large because conduction resistance is far higher than the convective resistance.
- (B) large because conduction resistance is far less than the convective resistance.
- (C) small because conduction resistance is far higher than the convective resistance.
- (D) small because conduction resistance is far less than the convective resistance.

A pump handling a liquid raises its pressure from 1 bar to 30 bar. Take the density of the liquid as 990 kg/m3. The isentropic specific work done by the pump in kJ/kg is

- (A) 0.10
- (B) 0.30
- (C) 2.50

Q.35 The crank radius of a single-cylinder I. C. engine is 60 mm and the diameter of the cylinder is 80 mm. The swept volume of the cylinder in cm3 is

- (A) 48
- (B) 96
- (C) 302
- (D) 603


Q.36 The ratios of the laminar hydrodynamic boundary layer thickness to thermal boundary layer thickness of flows of two fluids P and Q on a flat plate are $\frac{1}{2}$ and 2 respectively. The Reynolds number based on the plate length for both the flows is 104. The Prandtl and Nusselt numbers for P are $\frac{1}{9}$ and 35 respectively. The Prandtl and Nusselt numbers for Q are respectively

- (A) 8 and 140
- (B) 8 and 70
- (C) 4 and 70
- (D) 4 and 35

Q.37 The shear strength of a sheet metal is 300 MPa. The blanking force required to produce a blank of 100 mm diameter from a 1.5 mm thick sheet is close to

- (A) 45 kN
- (B) 70 kN
- (C) 141 kN
- D) 3500 kN

A mass of 1 kg is attached to two identical springs each with stiffness k = 20 kN/m as shown in the figure. Under frictionless condition, the natural frequency of the system in Hz is close to

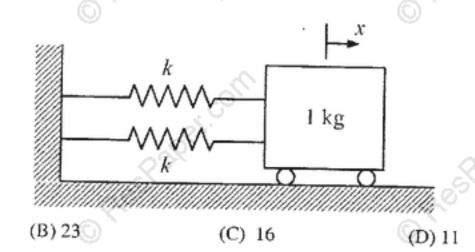

An unbiased coin is tossed five times. The outcome of each toss is either a head or a tail. The probability of getting at least one head is

(A) 32

- (B) $\frac{13}{32}$
- (C) $\frac{16}{32}$

Q.40 Consider the differential equation $\frac{dy}{dx} = (1 + y^2)x$. The general solution with constant c is


(A) $y = \tan \frac{x^2}{2} + \tan c$

(B) $y = \tan^2\left(\frac{x}{2} + c\right)$

(C) $y = \tan^2\left(\frac{x}{2}\right) + c$


(D) $y = \tan\left(\frac{x^2}{2} + c\right)$

Q.41 A stone with mass of 0.1 kg is catapulted as shown in the figure. The total force F_x (in N) exerted by the rubber band as a function of distance x (in m) is given by $F_x = 300x^2$. If the stone is displaced by 0.1 m from the un-stretched position (x = 0) of the rubber band, the energy stored in the rubber band is

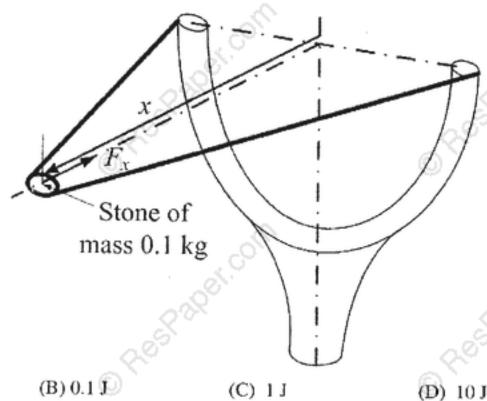

(A) 0.01 J

For the four-bar linkage shown in the figure, the angular velocity of link AB is 1 rad/s. The length of link CD is 1.5 times the length of link AB. In the configuration shown, the angular velocity of link CD in rad/s is

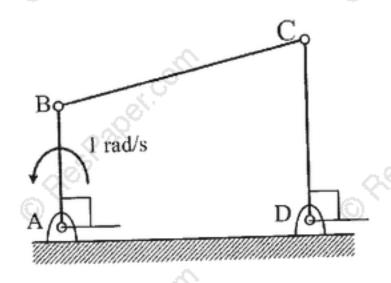

- (B) $\frac{3}{2}$
- (C) 1

Two identical ball bearings P and Q are operating at loads 30 kN and 45 kN respectively. The ratio of the life of bearing P to the life of bearing Q is

- (A) 81/16
- (B) 27/8
- (C) 9/4
- (D) 3/2


The integral $\int_{-\infty}^{\infty} \frac{1}{x} dx$, when evaluated by using Simpson's 1/3 rule on two equal subintervals each of length 1, equals

- (A) 1.000
- (B) 1.098
- (C) 1.111
- (D) 1.120


The values of enthalpy of steam at the inlet and outlet of a steam turbine in a Rankine cycle are 2800 kJ/kg and 1800 kJ/kg respectively. Neglecting pump work, the specific steam consumption in kg/kW-hour is

- (A) 3.60
- (B) 0.36
- (C) 0.06
- (D) 0.01

Q.46 A torque T is applied at the free end of a stepped rod of circular cross-sections as shown in the figure. The shear modulus of the material of the rod is G. The expression for d to produce an angular twist θ at the free end is

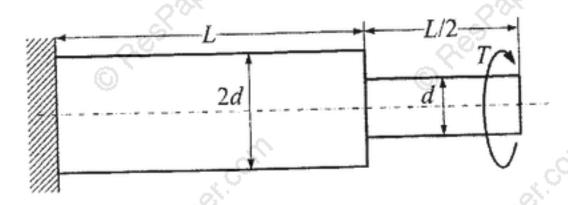

Q.47 Figure shows the schematic for the measurement of velocity of air (density = 1.2 kg/m³) through a constant-area duct using a pitot tube and a water-tube manometer. The differential head of water (density = 1000 kg/m³) in the two columns of the manometer is 10 mm. Take acceleration due to gravity as 9.8 m/s². The velocity of air in m/s is

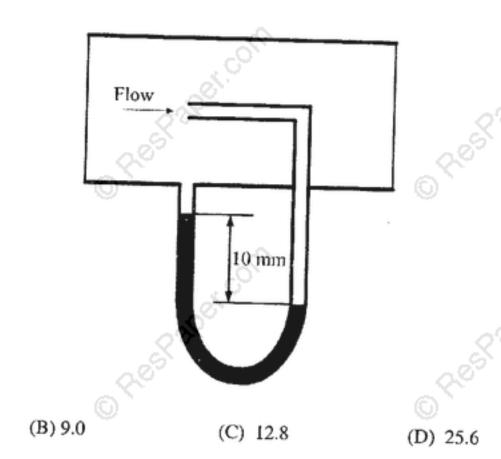

Common Data Questions

Common Data for Questions 48 and 49:

One unit of product P₁ requires 3 kg of resource R₁ and 1 kg of resource R₂. One unit of product P₂ requires 2 kg of resource R₁ and 2 kg of resource R₂. The profits per unit by selling product P₁ and P₂ are Rs. 2000 and Rs. 3000 respectively. The manufacturer has 90 kg of resource R₁ and 100 kg of resource R₂.

- Q.48 The manufacturer can make a maximum profit of Rs.
 - (A) 60000
- (B) 135000 O
- (C) 150000
- (D) 200000
- Q.49 The unit worth of resource R2, i.e. dual price of resource R2 in Rs. per kg is
 - (A) 0

- (B) 1350
- (C) 1500
- (D) 2000

Common Data for Questions 50 and 51:

In an experimental set-up, air flows between two stations P and Q adiabatically. The direction of flow depends on the pressure and temperature conditions maintained at P and Q. The conditions at station P are 150 kPa and 350 K. The temperature at station Q is 300 K.

The following are the properties and relations pertaining to air:

Specific heat at constant pressure, $c_p = 1.005 \text{ kJ/kgK}$;

Specific heat at constant volume, $c_v = 0.718 \text{ kJ/kgK}$;

Characteristic gas constant, R = 0.287 kJ/kgK.

Enthalpy, $h = c_p T$.

Internal energy, $u = c_v T$.

- Q.50 If the pressure at station Q is 50 kPa, the change in entropy $(s_Q s_P)$ in kJ/kgK is
 - (A) -0.155
- (B) 0

- (C) 0.160
- (D) 0.355
- Q.51 If the air has to flow from station P to station Q, the maximum possible value of pressure in kPa at station Q is close to
 - (A) 50

(B) 87


(C) 128

(D) 150

Linked Answer Questions

Statement for Linked Answer Questions 52 and 53:


The temperature and pressure of air in a large reservoir are 400 K and 3 bar respectively. A converging-diverging nozzle of exit area 0.005 m² is fitted to the wall of the reservoir as shown in the figure. The static pressure of air at the exit section for isentropic flow through the nozzle is 50 kPa. The characteristic gas constant and the ratio of specific heats of air are 0.287 kJ/kgK and 1.4 respectively.

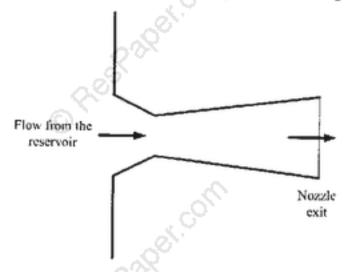

- Q.52 The density of air in kg/m3 at the nozzle exit is
 - (A) 0.560
- (B) 0.600
- (C) 0.727
- (D) 0.800
- Q.53 The mass flow rate of air through the nozzle in kg/s is
 - (A) 1.30
- (B) 1.77
- (C) 1.85
- (D) 2.06

Statement for Linked Answer Questions 54 and 55:

A triangular-shaped cantilever beam of uniform-thickness is shown in the figure. The Young's modulus of the material of the beam is E. A concentrated load P is applied at the free end of the beam.

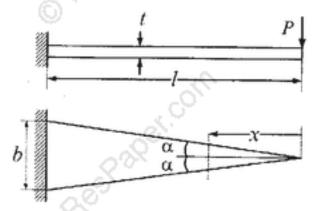

- Q.54 The area moment of inertia about the neutral axis of a cross-section at a distance x measured from the free end is
 - (A) $\frac{bxt^3}{6l}$
- (B) $\frac{bxt^3}{12l}$
- (C) $\frac{bxt^3}{24l}$
- (D) $\frac{xt^3}{12}$

- Q.55 The maximum deflection of the beam is
 - (A) $\frac{24Pl^3}{Ebt^3}$
- (B) $\frac{12Pl^3}{Ebt^3}$
- (C) $\frac{8Pl^3}{Ebt^3}$
- (D) $\frac{6Pl^3}{Ebt^3}$

_					
Genera	al Aptitude (GA) Qu	estions		0.65	
Q. 56 -	Q. 60 carry one ma	rk each.		© \(\)	
Q.56	Choose the most approsentence. I contemplated	priate word(s) from	the options given to my vacation but dec		e following
, S	(A) to visit (B) having to visit (C) visiting (D) for a visit	aes Paper		ag Staber.	
Q.57	Which of the following Inexplicable	options is the closes	t in the meaning to th	e word below:	
	(A) Incomprehensible(B) Indelible(C) Inextricable(D) Infallible		com		30
Q.58	Choose the most appr sentence. If you are trying to m understated, tentative	nake a strong impr			
	(A) hyperbolic(B) restrained(C) argumentative(D) indifferent		coll	-G	
Q.59	If $Log(P) = (1/2)Log($		then which of the foll	owing options is TRU	JE?
್ವಾಂ	(A) $P^2 = Q^3 R^2$	(B) $Q^2 = PR$	(C) $Q^2 = R^3P$	(D) $R = P^2Q^2$	
Q.60	Choose the word from word: Amalgamate	the options given be	elow that is most near	ly opposite in meanin	g to the given
	(A) merge (B) split (C) collect (D) separate	as.	com	AST. CS	
Q. 61	to Q. 65 carry two	narks each.		Sak	
Q.61	The variable cost (V) is the quantity produce to the equation F = 100	d. The fixed cost (F) of production of san	ne product reduces wi	tii q according

q ng

(A) 5

(B) 4

(C) 7

(D) 6

Few school curricula include a unit on how to deal with bereavement and grief, and yet all students at some point in their lives suffer from losses through death and parting.

Based on the above passage which topic would not be included in a unit on bereavement?

- (A) how to write a letter of condolence
- (B) what emotional stages are passed through in the healing process
- (C) what the leading causes of death are
- (D) how to give support to a grieving friend

Q.63 A transporter receives the same number of orders each day. Currently, he has some pending orders (backlog) to be shipped. If he uses 7 trucks, then at the end of the 4th day he can clear all the orders. Alternatively, if he uses only 3 trucks, then all the orders are cleared at the end of the 10th day. What is the minimum number of trucks required so that there will be no pending order at the end of the 5th day?


(A)4

(B) 5

(C) 6

(D) 7

Q.64 P, Q, R and S are four types of dangerous microbes recently found in a human habitat. The area of each circle with its diameter printed in brackets represents the growth of a single microbe surviving human immunity system within 24 hours of entering the body. The danger to human beings varies proportionately with the toxicity, potency and growth attributed to a microbe shown in the figure below:

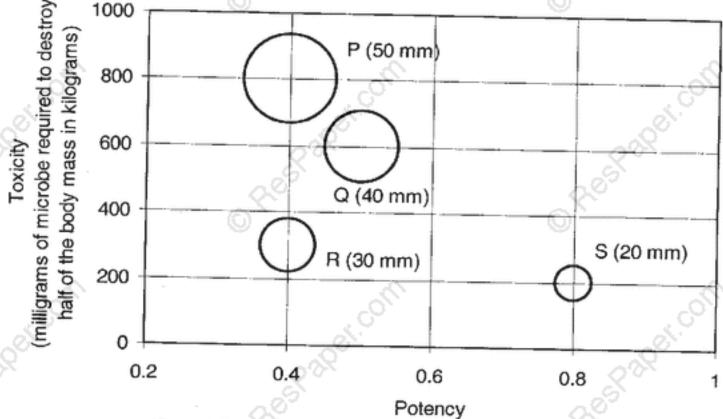

(Probability that microbe will overcome human immunity system)

A pharmaceutical company is contemplating the development of a vaccine against the most dangerous microbe. Which microbe should the company target in its first attempt?

(A) P

(B) Q

(C) R

(D) S

Q.65 A container originally contains 10 litres of pure spirit. From this container 1 litre of spirit is replaced with 1 litre of water. Subsequently, 1 litre of the mixture is again replaced with 1 litre of water and this process is repeated one more time. How much spirit is now left in the container?

(A) 7.58 litres

(B) 7.84 litres

(C) 7 litres

(D) 7.29 litres

END OF THE QUESTION PAPER