

Q. 1 – Q. 25 carry one mark each.

Q.1 Consider the following two statements.

NPTEL REFERENCE

S1: If a candidate is known to be corrupt, then he will not be elected

S2: If a candidate is kind, he will be elected

Which one of the following statements follows from S1 and S2 as per sound inference rules of logic?

- (A) If a person is known to be corrupt, he is kind
- (B) If a person is not known to be corrupt, he is not kind
- (C) If a person is kind, he is not known to be corrupt
- (D) If a person is not kind, he is not known to be corrupt

LINKS CREATED BY:

Nitin kumar

M.Tech

Computer Science and Engineering

IISC Bangalore

Q.2 The cardinality of the power set of $\{ 0, 1, 2, \dots, 10 \}$ is _____.

NPTEL REFERENCE

Q.3 Let R be the relation on the set of positive integers such that aRb if and only if a and b are distinct and have a common divisor other than 1. Which one of the following statements about R is true?

- (A) R is symmetric and reflexive but not transitive
- (B) R is reflexive but not symmetric and not transitive
- (C) R is transitive but not reflexive and not symmetric
- (D) R is symmetric but not reflexive and not transitive

NPTEL REFERENCE

Q.4 The number of divisors of 2100 is _____.

Q.5 The larger of the two eigenvalues of the matrix $\begin{bmatrix} 4 & 5 \\ 2 & 1 \end{bmatrix}$ is _____.

NPTEL REFERENCE

Q.6 An unordered list contains n distinct elements. The number of comparisons to find an element in this list that is neither maximum nor minimum is _____.

NPTEL REFERENCE

- (A) $\Theta(n \log n)$
- (B) $\Theta(n)$
- (C) $\Theta(\log n)$
- (D) $\Theta(1)$

Q.7 The minimum number of JK flip-flops required to construct a synchronous counter with the count sequence $(0,0,1,1,2,2,3,3,0,0,\dots)$ is _____.

NPTEL REFERENCE

Q.8 Assume that for a certain processor, a read request takes 50 nanoseconds on a cache miss and 5 nanoseconds on a cache hit. Suppose while running a program, it was observed that 80% of the processor's read requests result in a cache hit. The average read access time in nanoseconds is _____.

NPTEL REFERENCE 1 NPTEL REFERENCE 2

Q.9 A computer system implements a 40-bit virtual address, page size of 8 kilobytes, and a 128-entry translation look-aside buffer (TLB) organized into 32 sets each having four ways. Assume that the TLB tag does not store any process id. The minimum length of the TLB tag in bits is _____.

NPTEL REFERENCE

Q.10 Consider the following statements.

NPTEL REFERENCE

- I. The complement of every Turing decidable language is Turing decidable
- II. There exists some language which is in NP but is not Turing decidable
- III. If L is a language in NP, L is Turing decidable

Which of the above statements is/are true?

- (A) Only II (B) Only III (C) Only I and II (D) Only I and III

Q.11 Consider the following function written in the C programming language.

```
void foo(char *a){
    if ( *a && *a != ' ' ){
        foo(a+1);
        putchar(*a);
    }
}
```

NPTEL REFERENCE

The output of the above function on input “ABCD EFGH” is

- (A) ABCD EFGH (B) ABCD (C) HGFE DCBA (D) DCBA

Q.12 Consider a complete binary tree where the left and the right subtrees of the root are max-heaps. The lower bound for the number of operations to convert the tree to a heap is NPTEL REFERENCE

- (A) $\Omega(\log n)$ (B) $\Omega(n)$ (C) $\Omega(n \log n)$ (D) $\Omega(n^2)$

Q.13 A binary tree T has 20 leaves. The number of nodes in T having two children is _____.

NPTEL REFERENCE

Q.14 Consider the following C function.

```
int fun(int n){
    int x=1,k;
    if (n==1) return x;
    for (k=1; k<n; ++k)
        x = x + fun(k) * fun(n-k);
    return x;
}
```

NPTEL REFERENCE

The return value of fun(5) is _____.

Q.15 A software requirements specification (SRS) document should avoid discussing which one of the following?

NPTEL REFERENCE

- (A) User interface issues
- (B) Non-functional requirements
- (C) Design specification
- (D) Interfaces with third party software

Q.16 Consider two decision problems Q_1, Q_2 such that Q_1 reduces in polynomial time to 3-SAT and 3-SAT reduces in polynomial time to Q_2 . Then which one of the following is consistent with the above statement?

NPTEL REFERENCE

- (A) Q_1 is in NP, Q_2 is NP hard.
- (B) Q_2 is in NP, Q_1 is NP hard.
- (C) Both Q_1 and Q_2 are in NP.
- (D) Both Q_1 and Q_2 are NP hard.

Q.17 Match the following:

NPTEL REFERENCE

- | | |
|--------------------------|-------------------------|
| P. Lexical analysis | 1. Graph coloring |
| Q. Parsing | 2. DFA minimization |
| R. Register allocation | 3. Post-order traversal |
| S. Expression evaluation | 4. Production tree |

- | | |
|------------------------|------------------------|
| (A) P-2, Q-3, R-1, S-4 | (B) P-2, Q-1, R-4, S-3 |
| (C) P-2, Q-4, R-1, S-3 | (D) P-2, Q-3, R-4, S-1 |

Q.18 In the context of abstract-syntax-tree (AST) and control-flow-graph (CFG), which one of the following is TRUE?

NPTEL REFERENCE

- (A) In both AST and CFG, let node N_2 be the successor of node N_1 . In the input program, the code corresponding to N_2 is present after the code corresponding to N_1
- (B) For any input program, neither AST nor CFG will contain a cycle
- (C) The maximum number of successors of a node in an AST and a CFG depends on the input program
- (D) Each node in AST and CFG corresponds to at most one statement in the input program

Q.19 Consider the basic COCOMO model where E is the effort applied in person-months, D is the development time in chronological months, $KLOC$ is the estimated number of delivered lines of code (in thousands) and a_b, b_b, c_b, d_b have their usual meanings. The basic COCOMO equations are of the form

NPTEL REFERENCE

- (A) $E = a_b(KLOC) \exp(b_b), D = c_b(E) \exp(d_b)$
- (B) $D = a_b(KLOC) \exp(b_b), E = c_b(D) \exp(d_b)$
- (C) $E = a_b \exp(b_b), D = c_b(KLOC) \exp(d_b)$
- (D) $E = a_b \exp(d_b), D = c_b(KLOC) \exp(b_b)$

Q.20 A system has 6 identical resources and N processes competing for them. Each process can request atmost 2 resources. Which one of the following values of N could lead to a deadlock?

- (A) 1 (B) 2 (C) 3 (D) 4 NPTEL REFERENCE

Q.21 Consider the following transaction involving two bank accounts x and y .


```
read(x); x := x - 50; write(x); read(y); y:= y + 50; write(y)
```

The constraint that the sum of the accounts x and y should remain constant is that of

- (A) Atomicity (B) Consistency NPTEL REFERENCE
(C) Isolation (D) Durability

Q.22 With reference to the B+ tree index of order 1 shown below, the minimum number of nodes (including the Root node) that must be fetched in order to satisfy the following query: "Get all records with a search key greater than or equal to 7 and less than 15" is _____.

NPTEL REFERENCE

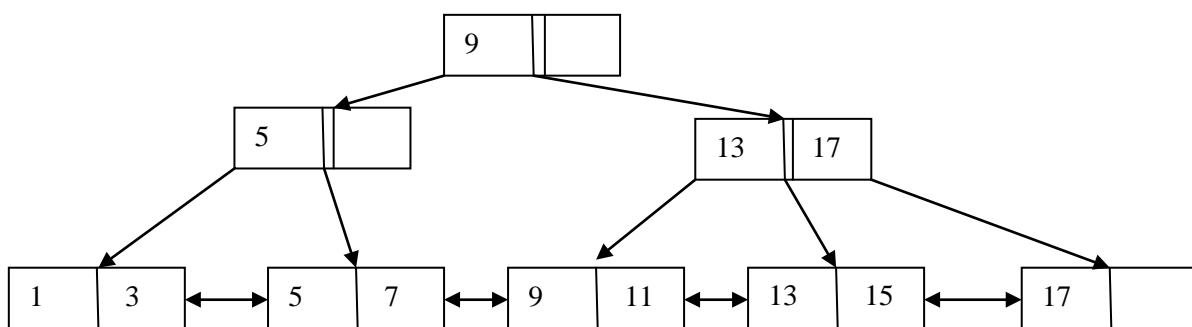

Q.23 Identify the correct order in which a server process must invoke the function calls `accept`, `bind`, `listen`, and `recv` according to UNIX socket API. NPTEL REFERENCE

- (A) listen, accept, bind, recv (B) bind, listen, accept, recv
(C) bind, accept, listen, recv (D) accept, listen, bind, recv

Q.24 A link has a transmission speed of 10^6 bits/sec. It uses data packets of size 1000 bytes each. Assume that the acknowledgment has negligible transmission delay, and that its propagation delay is the same as the data propagation delay. Also assume that the processing delays at nodes are negligible. The efficiency of the stop-and-wait protocol in this setup is exactly 25%. The value of the one-way propagation delay (in milliseconds) is _____. NPTEL REFERENCE 1

NPTEL REFERENCE 2

Q.25 Which one of the following statements is NOT correct about HTTP cookies? NPTEL REFERENCE

- (A) A cookie is a piece of code that has the potential to compromise the security of an Internet user
(B) A cookie gains entry to the user's work area through an HTTP header
(C) A cookie has an expiry date and time
(D) Cookies can be used to track the browsing pattern of a user at a particular site

Q. 26 – Q. 55 carry two marks each.

Q.26 Consider the following routing table at an IP router:

NPTEL REFERENCE

Network No.	Net Mask	Next Hop
128.96.170.0	255.255.254.0	Interface 0
128.96.168.0	255.255.254.0	Interface 1
128.96.166.0	255.255.254.0	R2
128.96.164.0	255.255.252.0	R3
0.0.0.0	Default	R4

For each IP address in Group I identify the correct choice of the next hop from Group II using the entries from the routing table above.

Group I

- i) 128.96.171.92
- ii) 128.96.167.151
- iii) 128.96.163.151
- iv) 128.96.165.121

Group II

- a) Interface 0
- b) Interface 1
- c) R2
- d) R3
- e) R4

- (A) i-a, ii-c, iii-e, iv-d
- (C) i-b, ii-c, iii-d, iv-e

- (B) i-a, ii-d, iii-b, iv-e
- (D) i-b, ii-c, iii-e, iv-d

Q.27 Host A sends a UDP datagram containing 8880 bytes of user data to host B over an Ethernet LAN. Ethernet frames may carry data up to 1500 bytes (i.e. MTU=1500 bytes). Size of UDP header is 8 bytes and size of IP header is 20 bytes. There is no option field in IP header. How many total number of IP fragments will be transmitted and what will be the contents of offset field in the last fragment?

NPTEL REFERENCE

- (A) 6 and 925
- (B) 6 and 7400
- (C) 7 and 1110
- (D) 7 and 8880

Q.28 Assume that the bandwidth for a TCP connection is 1048560 bits /sec. Let α be the value of RTT in milliseconds (rounded off to the nearest integer) after which the TCP window scale option is needed. Let β be the maximum possible window size with window scale option. Then the values of α and β are

NPTEL REFERENCE

- (A) 63 milliseconds, 65535×2^{14}
- (B) 63 milliseconds, 65535×2^{16}
- (C) 500 milliseconds, 65535×2^{14}
- (D) 500 milliseconds, 65535×2^{16}

Q.29 Consider a simple checkpointing protocol and the following set of operations in the log.

(start, T4); (write, T4, y, 2, 3); (start, T1); (commit, T4); (write, T1, z, 5, 7);
(checkpoint);

(start, T2); (write, T2, x, 1, 9); (commit, T2); (start, T3), (write, T3, z, 7, 2); NPTEL REFERENCE

If a crash happens now and the system tries to recover using both undo and redo operations, what are the contents of the undo list and the redo list?

- (A) Undo: T3, T1; Redo: T2
(B) Undo: T3, T1; Redo: T2, T4
(C) Undo: none; Redo: T2, T4, T3, T1
(D) Undo: T3, T1, T4; Redo: T2

Q.30 Consider two relations $R_1(A,B)$ with the tuples (1,5), (3,7) and $R_2(A,C) = (1,7), (4,9)$. Assume that $R(A,B,C)$ is the full natural outer join of R_1 and R_2 . Consider the following tuples of the form (A,B,C): $a = (1,5,null)$, $b = (1,null,7)$, $c = (3, null, 9)$, $d = (4,7,null)$, $e = (1,5,7)$, $f = (3,7,null)$, $g = (4,null,9)$. Which one of the following statements is correct?

NPTEL REFERENCE 1

- (A) R contains a, b, e, f, g but not c, d .
(B) R contains all of a, b, c, d, e, f, g .
(C) R contains e, f, g but not a, b .
(D) R contains e but not f, g .

NPTEL REFERENCE 2

Q.31 Consider six memory partitions of sizes 200 KB, 400 KB, 600 KB, 500 KB, 300 KB and 250 KB, where KB refers to kilobyte. These partitions need to be allotted to four processes of sizes 357 KB, 210 KB, 468 KB and 491 KB in that order. If the best fit algorithm is used, which partitions are NOT allotted to any process?

NPTEL REFERENCE

- (A) 200 KB and 300 KB
(B) 200 KB and 250 KB
(C) 250 KB and 300 KB
(D) 300 KB and 400 KB

Q.32 Consider a typical disk that rotates at 15000 rotations per minute (RPM) and has a transfer rate of 50×10^6 bytes/sec. If the average seek time of the disk is twice the average rotational delay and the controller's transfer time is 10 times the disk transfer time, the average time (in milliseconds) to read or write a 512-byte sector of the disk is _____.

NPTEL REFERENCE

Q.33 A computer system implements 8 kilobyte pages and a 32-bit physical address space. Each page table entry contains a valid bit, a dirty bit, three permission bits, and the translation. If the maximum size of the page table of a process is 24 megabytes, the length of the virtual address supported by the system is _____ bits.

NPTEL REFERENCE

Q.34 Consider the intermediate code given below.

- (1) $i = 1$
- (2) $j = 1$
- (3) $t1 = 5 * i$
- (4) $t2 = t1 + j$
- (5) $t3 = 4 * t2$
- (6) $t4 = t3$
- (7) $a[t4] = -1$
- (8) $j = j + 1$
- (9) $\text{if } j \leq 5 \text{ goto } (3)$
- (10) $i = i + 1$
- (11) $\text{if } i < 5 \text{ goto } (2)$

NPTEL REFERENCE

The number of nodes and edges in the control-flow-graph constructed for the above code, respectively, are

- (A) 5 and 7 (B) 6 and 7 (C) 5 and 5 (D) 7 and 8

Q.35 The number of states in the minimal deterministic finite automaton corresponding to the regular expression $(0 + 1)^*(10)$ is _____.

NPTEL REFERENCE

Q.36 Which of the following languages is/are regular?

NPTEL REFERENCE

- $L_1: \{wxw^R \mid w, x \in \{a, b\}^* \text{ and } |w|, |x| > 0\}$, w^R is the reverse of string w
 $L_2: \{a^n b^m \mid m \neq n \text{ and } m, n \geq 0\}$
 $L_3: \{a^p b^q c^r \mid p, q, r \geq 0\}$

- (A) L_1 and L_3 only (B) L_2 only (C) L_2 and L_3 only (D) L_3 only

Q.37 Given below are some algorithms, and some algorithm design paradigms.

- | | |
|----------------------------------------------------------------|-------------------------|
| 1. Dijkstra's Shortest Path | i. Divide and Conquer |
| 2. Floyd-Warshall algorithm to compute all pairs shortest path | ii. Dynamic Programming |
| 3. Binary search on a sorted array | iii. Greedy design |
| 4. Backtracking search on a graph | iv. Depth-first search |
| | v. Breadth-first search |

Match the above algorithms on the left to the corresponding design paradigm they follow.

- (A) 1-i, 2-iii, 3-i, 4-v.
 (B) 1-iii, 2-iii, 3-i, 4-v.
 (C) 1-iii, 2-ii, 3-i, 4-iv.
 (D) 1-iii, 2-ii, 3-i, 4-v.

NPTEL REFERENCE

NPTEL REFERENCE 3

NPTEL REFERENCE 2

- Q.38 A Young tableau is a 2D array of integers increasing from left to right and from top to bottom. Any unfilled entries are marked with ∞ , and hence there cannot be any entry to the right of, or below a ∞ . The following Young tableau consists of unique entries.

1	2	5	14
3	4	6	23
10	12	18	25
31	∞	∞	∞

NPTEL REFERENCE

When an element is removed from a Young tableau, other elements should be moved into its place so that the resulting table is still a Young tableau (unfilled entries may be filled in with a ∞). The minimum number of entries (other than 1) to be shifted, to remove 1 from the given Young tableau is _____.

- Q.39 Suppose you are provided with the following function declaration in the C programming language.

```
int partition(int a[], int n);
```

NPTEL REFERENCE

The function treats the first element of $a[]$ as a pivot, and rearranges the array so that all elements less than or equal to the pivot is in the left part of the array, and all elements greater than the pivot is in the right part. In addition, it moves the pivot so that the pivot is the last element of the left part. The return value is the number of elements in the left part.

The following partially given function in the C programming language is used to find the k^{th} smallest element in an array $a[]$ of size n using the partition function. We assume $k \leq n$.

```
int kth_smallest(int a[], int n, int k)
{
    int left_end = partition(a,n);

    if ( left_end+1 == k ){
        return a[left_end];
    }

    if ( left_end+1 > k ){
        return kth_smallest( _____ );
    } else {
        return kth_smallest( _____ );
    }
}
```

The missing argument lists are respectively

- (A) $(a, \text{left_end}, k)$ and $(a+\text{left_end}+1, n-\text{left_end}-1, k-\text{left_end}-1)$
 (B) $(a, \text{left_end}, k)$ and $(a, n-\text{left_end}-1, k-\text{left_end}-1)$
 (C) $(a+\text{left_end}+1, n-\text{left_end}-1, k-\text{left_end}-1)$ and $(a, \text{left_end}, k)$
 (D) $(a, n-\text{left_end}-1, k-\text{left_end}-1)$ and $(a, \text{left_end}, k)$
- Q.40 Which one of the following hash functions on integers will distribute keys most uniformly over 10 buckets numbered 0 to 9 for i ranging from 0 to 2020?

NPTEL REFERENCE

- (A) $h(i) = i^2 \bmod 10$
 (B) $h(i) = i^3 \bmod 10$
 (C) $h(i) = (11 * i^2) \bmod 10$
 (D) $h(i) = (12 * i) \bmod 10$

Q.41 The secant method is used to find the root of an equation $f(x) = 0$. It is started from two distinct estimates x_a and x_b for the root. It is an iterative procedure involving linear interpolation to a root. The iteration stops if $f(x_b)$ is very small and then x_b is the solution. The procedure is given below. Observe that there is an expression which is missing and is marked by ?. Which is the suitable expression that is to be put in place of ? so that it follows all steps of the secant method?

Secant

```

Initialize:  $x_a, x_b, \epsilon, N$            //  $\epsilon$  = convergence indicator
                                           //  $N$  = maximum no. of iterations

 $f_b = f(x_b)$ 
 $i = 0$ 
while ( $i < N$  and  $|f_b| > \epsilon$ ) do
     $i = i + 1$            // update counter
     $x_t = ?$            // missing expression for
                       // intermediate value
     $x_a = x_b$            // reset  $x_a$ 
     $x_b = x_t$            // reset  $x_b$ 
     $f_b = f(x_b)$        // function value at new  $x_b$ 
end while
if  $|f_b| > \epsilon$  then // loop is terminated with  $i=N$ 
    write "Non-convergence"
else
    write "return  $x_b$ "
end if

```

NPTEL REFERENCE

- (A) $x_b - (f_b - f(x_a))f_b / (x_b - x_a)$
 (B) $x_a - (f_a - f(x_a))f_a / (x_b - x_a)$
 (C) $x_b - (x_b - x_a)f_b / (f_b - f(x_a))$
 (D) $x_a - (x_b - x_a)f_a / (f_b - f(x_a))$

Q.42 Consider the C program below.

```
#include <stdio.h>
int *A, stkTop;

int stkFunc(int opcode, int val)
{
    static int size=0, stkTop=0;

    switch (opcode) {
        case -1: size = val; break;
        case 0: if (stkTop < size) A[stkTop++] = val; break;
        default: if (stkTop) return A[--stkTop];
    }
    return -1;
}

int main()
{
    int B[20]; A = B; stkTop = -1;

    stkFunc (-1, 10);
    stkFunc ( 0, 5);
    stkFunc ( 0, 10);
    printf ("%d\n", stkFunc(1, 0) + stkFunc(1, 0));
}
```

NPTEL REFERENCE

The value printed by the above program is _____.

Q.43 Consider the sequence of machine instructions given below:

NPTEL REFERENCE

```
MUL    R5, R0, R1
DIV    R6, R2, R3
ADD    R7, R5, R6
SUB    R8, R7, R4
```

NPTEL REFERENCE 2

In the above sequence, R0 to R8 are general purpose registers. In the instructions shown, the first register stores the result of the operation performed on the second and the third registers. This sequence of instructions is to be executed in a pipelined instruction processor with the following 4 stages: (1) Instruction Fetch and Decode (IF), (2) Operand Fetch (OF), (3) Perform Operation (PO) and (4) Write back the result (WB). The IF, OF and WB stages take 1 clock cycle each for any instruction. The PO stage takes 1 clock cycle for ADD or SUB instruction, 3 clock cycles for MUL instruction and 5 clock cycles for DIV instruction. The pipelined processor uses operand forwarding from the PO stage to the OF stage. The number of clock cycles taken for the execution of the above sequence of instructions is _____.

Q.44 Consider a processor with byte-addressable memory. Assume that all registers, including Program Counter (PC) and Program Status Word (PSW), are of size 2 bytes. A stack in the main memory is implemented from memory location $(0100)_{16}$ and it grows upward. The stack pointer (SP) points to the top element of the stack. The current value of SP is $(016E)_{16}$. The CALL instruction is of two words, the first word is the op-code and the second word is the starting address of the subroutine (one word = 2 bytes). The CALL instruction is implemented as follows:

- Store the current value of PC in the stack NPTEL REFERENCE 1
- Store the value of PSW register in the stack NPTEL REFERENCE 2
- Load the starting address of the subroutine in PC

The content of PC just before the fetch of a CALL instruction is $(5FA0)_{16}$. After execution of the CALL instruction, the value of the stack pointer is

- (A) $(016A)_{16}$ (B) $(016C)_{16}$ (C) $(0170)_{16}$ (D) $(0172)_{16}$

Q.45 The number of min-terms after minimizing the following Boolean expression is _____.

$$[D' + AB' + A'C + AC'D + A'C'D]'$$
 NPTEL REFERENCE

Q.46 Let $f(x) = x^{-(1/3)}$ and A denote the area of the region bounded by $f(x)$ and the X-axis, when x varies from -1 to 1 . Which of the following statements is/are TRUE? NPTEL REFERENCE

- I) f is continuous in $[-1, 1]$
- II) f is not bounded in $[-1, 1]$
- III) A is nonzero and finite

- (A) II only (B) III only
(C) II and III only (D) I, II and III

Q.47 Perform the following operations on the matrix $\begin{bmatrix} 3 & 4 & 45 \\ 7 & 9 & 105 \\ 13 & 2 & 195 \end{bmatrix}$. NPTEL REFERENCE

- (i) Add the third row to the second row
- (ii) Subtract the third column from the first column.

The determinant of the resultant matrix is _____.

Q.48 The number of onto functions (surjective functions) from set $X = \{1, 2, 3, 4\}$ to set $Y = \{a, b, c\}$ is _____ NPTEL REFERENCE

Q.49 Let X and Y denote the sets containing 2 and 20 distinct objects respectively and F denote the set of all possible functions defined from X to Y . Let f be randomly chosen from F . The probability of f being one-to-one is _____ NPTEL REFERENCE

- Q.50 Consider the alphabet $\Sigma = \{0, 1\}$, the null/empty string λ and the sets of strings X_0 , X_1 , and X_2 generated by the corresponding non-terminals of a regular grammar. X_0 , X_1 , and X_2 are related as follows.

NPTEL REFERENCE

$$\begin{aligned} X_0 &= 1 X_1 \\ X_1 &= 0 X_1 + 1 X_2 \\ X_2 &= 0 X_1 + \{\lambda\} \end{aligned}$$

Which one of the following choices precisely represents the strings in X_0 ?

- (A) $10(0^* + (10)^*)1$ (B) $10(0^* + (10)^*)^*1$
 (C) $1(0 + 10)^*1$ (D) $10(0 + 10)^*1 + 110(0 + 10)^*1$
- Q.51 A graph is self-complementary if it is isomorphic to its complement. For all self-complementary graphs on n vertices, n is

NPTEL REFERENCE

- (A) A multiple of 4
 (B) Even
 (C) Odd
 (D) Congruent to 0 mod 4, or, 1 mod 4.

- Q.52 In a connected graph, a bridge is an edge whose removal disconnects a graph. Which one of the following statements is true?

NPTEL REFERENCE

- (A) A tree has no bridges
 (B) A bridge cannot be part of a simple cycle
 (C) Every edge of a clique with size ≥ 3 is a bridge (A clique is any complete subgraph of a graph)
 (D) A graph with bridges cannot have a cycle

- Q.53 Which one of the following well formed formulae is a tautology? NPTEL REFERENCE 1

- (A) $\forall x \exists y R(x, y) \leftrightarrow \exists y \forall x R(x, y)$
 (B) $(\forall x [\exists y R(x, y) \rightarrow S(x, y)]) \rightarrow \forall x \exists y S(x, y)$
 (C) $[\forall x \exists y (P(x, y) \rightarrow R(x, y))] \leftrightarrow [\forall x \exists y (\neg P(x, y) \vee R(x, y))]$
 (D) $\forall x \forall y P(x, y) \rightarrow \forall x \forall y P(y, x)$

- Q.54 Which one of the following assertions concerning code inspection and code walkthrough is true?

- (A) Code inspection is carried out once the code has been unit tested
 (B) Code inspection and code walkthrough are synonyms
 (C) Adherence to coding standards is checked during code inspection
 (D) Code walkthrough is usually carried out by an independent test team

- Q.55 A half adder is implemented with XOR and AND gates. A full adder is implemented with two half adders and one OR gate. The propagation delay of an XOR gate is twice that of an AND/OR gate. The propagation delay of an AND/OR gate is 1.2 microseconds. A 4-bit ripple-carry binary adder is implemented by using four full adders. The total propagation time of this 4-bit binary adder in microseconds is_____.

END OF THE QUESTION PAPER